

1700 EX



www.ommelift.com

Trailer lift - Articulated


Omme Lift A/S
Lægårdsvej 4
7260 Sdr. Omme, Denmark
Phone: (+45) 75 34 13 00
Email: omme@ommelift.dk - Web: www.ommelift.com

OMMELIFT



Quality since 1906

1700 EX Trailer lift

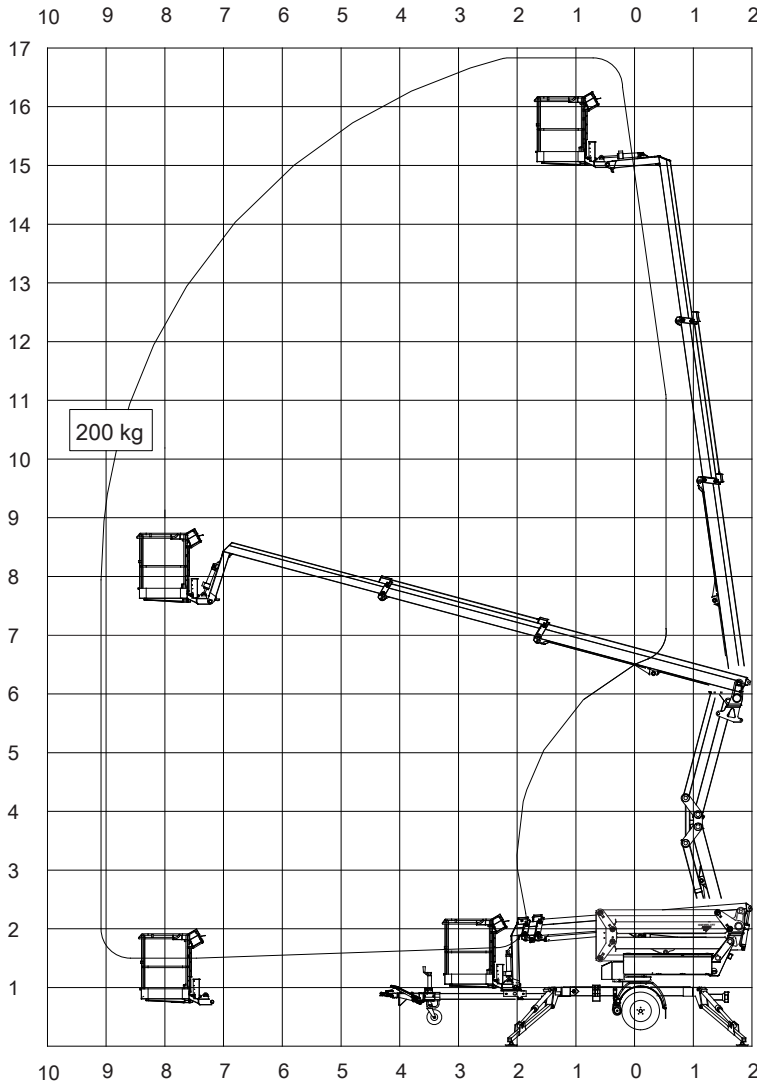

Technical Data:		1700 EX	1700 EXB
Max. working height		16.8 m	
Max. platform height		14.8 m	
Max. outreach		9.1 m	
Up and over clearance		6.0 m	
Angle boom length (boom + basket)		2.0 m	
Jib length (jib + basket)		-	
Vertical jib rotation		-	
Turret rotation		± 400°	
Basket rotation		± 50°	
Max. basket load		200 kg	
Basket size		1.25 x 0.8 x 1.1 m	
Stabilizer pad size		ø160 mm / ø120 mm	
	⁵ Petrol ⁶ Diesel	230V / 16A	BATTERY
Engine		⁵ Optional ⁶	⁵ Optional ⁶
Fuel tank capacity			
Generator			
Battery pack			24V/200Ah/5h
Charger			24 V / 30 A
Double charger system			Optional
Elec. descent		Optional	Optional
See www.ommelift.com for more features and options			
Self-propulsion with hydraulic engagement of traction rollers		Standard	
Gradeability		14% (8°)	
Ground to tire clearance at max. set-up		300 mm	
Total weight		2060 kg	2200 kg
Ground pressure, outrigger pad		12.4 kg/cm ²	12.4 kg/cm ²
Ground pressure with 0.4 x 0.4 m spreader plate		0.7 kg/cm ²	0.7 kg/cm ²
Max. force, outrigger		10.5 kN	10.5 kN
Hydraulic stabilizers		Standard	
Controls		Proportional	
Flush basket mount		Standard	
Elec. power outlet in basket		Standard	
Tool trays in basket		Standard	

