
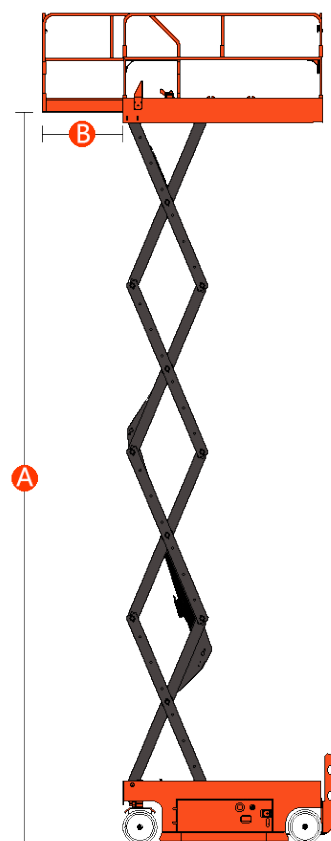


Specifications

Models	GTJZ0808	
Dimensions	Metric	US
A Platform height max.	8.1 m	27 ft
Working height max.*	10.1 m	33 ft
B Horizontal reach max.	0.9 m	3 ft
C Length - stowed	2.39 m	7 ft 8 in
Width - stowed	0.81 m	2 ft 7 in
D Height – folding guardrails	2.35 m	7 ft 7 in
Height – rails folded	1.96 m	6 ft 4 in
Height – fixed rails	2.35 m	7 ft 7 in
E Wheelbase	1.85 m	6 ft
Ground clearance	0.1 m	4 in
Platform size(L*W*H)	2.25 m* 0.81 m* 1.1 m	7 ft 4 in* 2 ft 7 in* 3 ft 6 in
Productivity		
Max. platform occupancy	2	2
Lift capacity	250 kg	551 lbs
Lift capacity - extension deck	120 kg	265 lbs
Drive speed - stowed	0~3.2 km/h	0~2.0 mph
Drive speed - raised	0~0.8 km/h	0~0.5 mph
Gradeability**	25%	25%
Turning radius - inside	0 m	0 ft
Turning radius - outside	2.1 m	6 ft 9 in
Raise / Lower speed	33/37 s	33/37 s
Controls	Proportional	Proportional
Drives	Dual front wheel	Dual front wheel
Brakes	Dual rear wheel	Dual rear wheel
Tire size(solid non-marking)	380 mm * 125 mm	15 in * 5 in
Power		
Power Source	24VDC (4*6V, 225Ah batteries)	24VDC (4*6V, 225Ah batteries)
Hydraulic system capacity	18 L	4.76 gal
Power	3 KW	3 KW
Weight***		
Indoor	1920 kg	4233 lbs
Standards Compliance		
	CE/ ISO/ ADR/ ARAMCO	CE/ ISO/ ADR/ ARAMCO

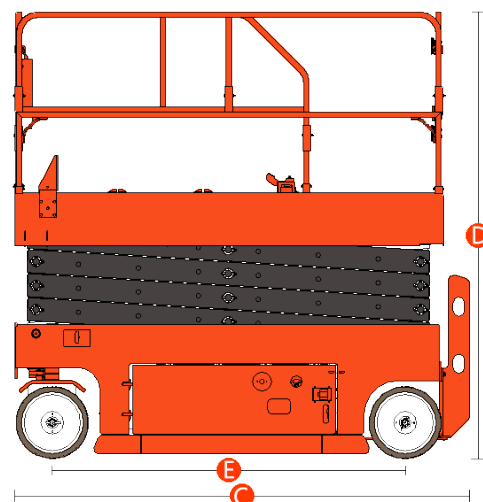

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes.

*** Weight will vary depending on options and/or country standards.

Hunan Sinoboom Heavy Industry Co., Ltd.

Address: No.128, East Jinzhou Avenue, Jinzhou New District, Changsha, Hunan, China

Tel: +0086-731-87116222 Email: sales@sinoboom.com

Website: www.sinoboom.com