

ARTICULATING BOOM

HA 41 PX



- Max. 63 ft (19.80 m) horizontal outreach.
- 54 ft 2 in (17.75 m) up and over clearance.
- Standard 4 wheel drive and steer.
- Extending and oscillating axles.
- Continuous outreach control



Haulotte 
GROUP

The Haulotte® advantages



- 63 ft (19.80m) maximum outreach with articulated jib pivot at 54ft 2in (17.75 m)
- Gradeability up to 40%
- Hydraulic differential lock and 15 in (38 cm) ground clearance for improved rough terrain capability
- Continuous 360° turntable rotation
- Full proportional controls and simultaneous boom functions improve functionality
- Load limiter in platform
- Improved working area via a positive/negative movement articulated fly jib having 140° arc of movement.
- 180° hydraulic platform rotation
- Robust, reliable and easy to maintain design

STANDARD FEATURES

- 4 wheel drive and steer
- 2 extending axles
- Oscillating axle
- Rotating engine tray for easier maintenance
- 5° tilt alarm
- 12 V battery / electrical control system
- Electric emergency group in cage
- Free wheeling device
- Hourmeter
- Slewing block pin
- Towing hooks
- Safe use in winds up to 27.9 mph (45 km/h)

OPTIONS & ACCESSORIES

- On-board 3.3 kw generator
- 230 V / 115 V - 16 A power line from chassis to platform
- Biodegradable hydraulic oil
- Travel alarm
- Rotating beacon
- Working light
- Catalytic exhaust
- Encoded starting device

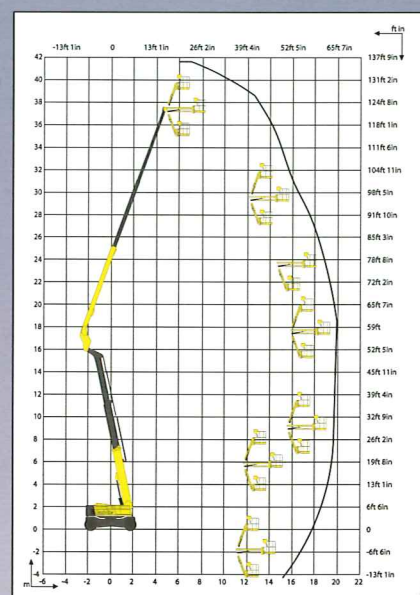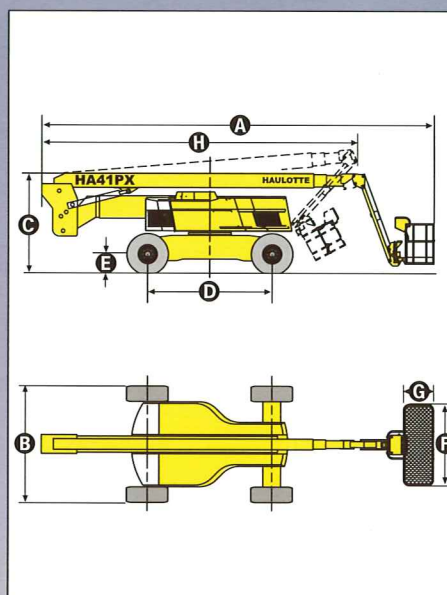

SPECIFICATIONS

HA 41 PX		
Working height	41 m	134 ft 6 in
Platform height	39 m	128 ft 0 in
Maximum outreach	19.80 m	63 ft 0 in
Up and over clearance	17.75 m	54 ft 2 in
Platform capacity	230 kg	507 lb
Fly jib arc of movement	140° (70° / +70°)	
A Length	12.50 m	41 ft 0 in
B Width	2.53 m	8 ft 4 in
Width (with axles extended)	3.33 m	10 ft 11 in
C Stowed height	3.05 m	10 ft 0 in
D Wheelbase	3.50 m	11 ft 6 in
E Ground clearance	38 cm	15 in
F X G Platform size	2.44 m x 0.8 m	96 in x 32 in
H Travel / transport length	11 m	36 ft 1 in
Tailswing	0.50 m	1 ft 8 in
Drive speed	5 km/h	3 mph
Outside turning radius	5.10 m	16 ft 9 in
Turntable rotation (continuous)	360°	
Hydraulic platform rotation	180°	
Engine	Perkins Diesel - 64 kW - 87 hp	
Gradeability	40%	
Tyres (foam filled)	445 / 65 - 22,5	
Hydraulic tank	240 l	63 gal
Fuel tank	140 l	37 gal
Weight	23 100 kg	49,613 lb

AS1418.10

